


# FT9361-R

## VAST Face Facial Recognition Tablet

---

- Hands-Free Access Control
- Accurate Authentication
- Large Capacity of Facial Profiles
- Dual Accreditation Available



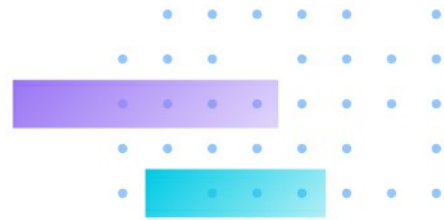

# Technical Specifications

## System Information

Model	FT9361-R
SoC	Multimedia SoC (System-on-Chip)
OS	Linux
ROM	8 GB
RAM	1 GB

## Camera

IR Camera	1.3M @1280x1080
RGB Camera	1920x1080(2M)
WDR	RGB > 100dB
Low Lux	RGB < 0.01 lux @F1.2 IR < 0.01 lux @F1.2

## Display

LED Panel	IPS 6" (1440x720)
-----------	-------------------

## Build-in Card Reader Information

13.56Mhz	Mifare
----------	--------

## Facial Recognition

Recognition Distance	0.3M-1.5M
Recognition Speed	< 1 sec
Database Size	50,000 Profiles(Max.)

## Alarm

Tamper Switch Alarm	Audio alarm
---------------------	-------------

## General

Audio Function	Built-in speaker
Connectors	RJ-45 cable connector for 10/100Mbps Network/PoE connection
Weigand	output 24bit/26bit/32bit/34bit
DI x 3	NO/NC/COM
DO x 3	NO/NC/COM
Relay x 1	NO/NC/COM
Power Input	PSE Class 4 (IEEE802.3at)//DC 12V
Dimensions	221.1mm X 103.6mm X 26.5mm
Certifications	EMC: CE, FCC, NCC
Operating Temperature	-20°C ~ 60°C / -4°F ~ 140°F
Humidity	90% RH (non-condensing)
IP Ranking	IP65



All specifications are subject to change without notice. Copyright© VIVOTEK INC. All rights reserved. Ver.12